


**8-016 / Web Sling Connector.**  
Grade 80 Lifting Chain & Fittings



**Description**

★ Design factor 4:1 proof tested and certified. Tested acc. to DIN EN 1677



**Specification**


Item No.	Working Load Limit	For Grade 80 Chain(mm)	Dimensions (mm)					N.W
			A	B	D	K	W	
	tonnes*	mm						Kg
8-016-06	1.12	6	15	17	7	55	38	0.2
8-016-07	2.0	7, 8	18	22	9	62	40	0.3
8-016-10	3.15	10	25	26	11	78	47	0.6
8-016-13	5.3	13	30	35	16	95	53	1.1
8-016-16	8.0	16	36	38	19	115	67	1.9
8-016-20	12.5	18, 20	42	46	22	132	80	3.2
8-016-22	15.0	22	49	59	24	187	125	7.5
8-016-26	21.2	26	55	62	30	209	150	12.0
8-016-32	31.5	32	69	79	36	279	190	19.0

**X-016 / G-100 Web Sling Connector.**  
Grade100 Lifting Chain Fittings



**Description**

★ Design factor 4:1 proof tested and certified.

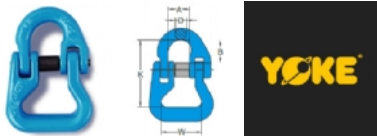

**Specification**

3D file Download	Item No.	Working Load Limit tonnes*	For Grade 100 Chain (mm) mm	Dimensions (mm)					N.
				A	B	D	K	W	
	X-016-06	1.4	6	15	17	7	56	39	0.
	X-016-07	2.5	7, 8	18	23	9	63	39	0.
	X-016-10	4.0	10	25	27	11	77	46	0.
	X-016-13	6.7	13	30	37	16	97	53	1.
	X-016-16	10.0	16	36	39	19	114	66	2.
	X-016-20	16.0	20	42	46	23	132	79	3.
	X-016-22	19.0	22	49	59	24	188	124	7.

**Back**